


Anschluß-
armatur

Manifold
head

Raccord pour
bouteilles
échangeuses d'ions


Racor Adaptador
para Botellas de
intercambio Ionico

Typ ANA

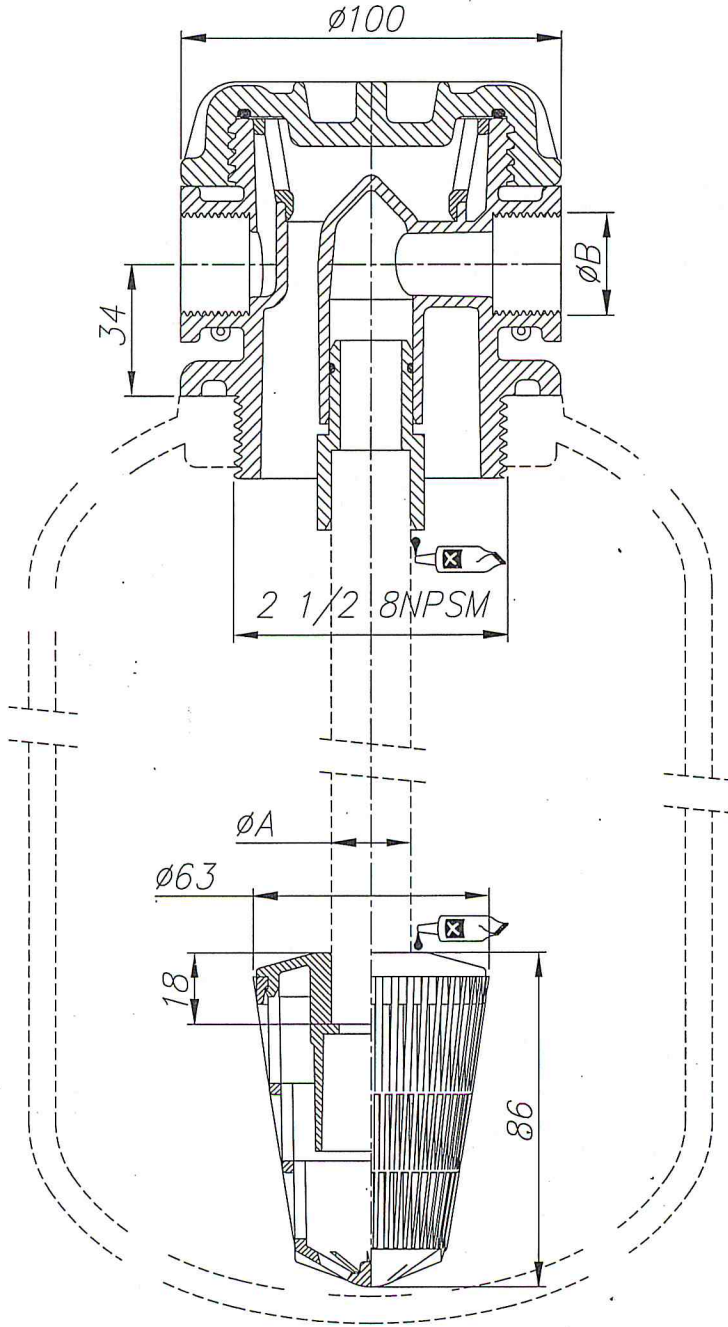


P max. 8 bar - 120 PSI

T max. 45°C - 110°F

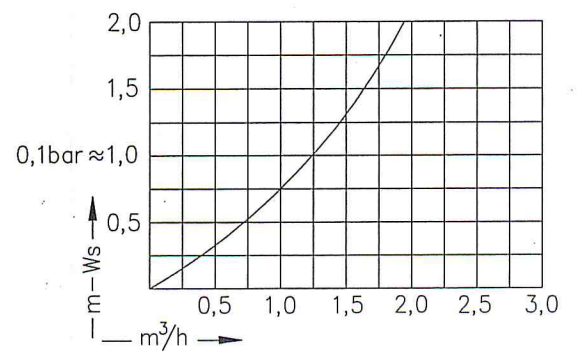


Bestellung Ordering Commande Encargo	Typ Type Type Tipa	Schlitz Slots Fentes Ranuras	ØA = mm		Gewinde Thread Filetage Rosca	ØB
✉	ANA		1"	Ø 25,4	1/4"NPT G 3/4" 3/4"NPT	
			13/16	Ø 20,64		
			1,05"	Ø 26,67		
			25	Ø 25,2		
	GDU	0,2 = 5,22 cm²	1"	Ø 25,4		
			13/16	Ø 20,64		
			1,05"	Ø 26,67		
			25	Ø 25,2		

Typ Type Type Tipa	
ANA-S	



WRENCH Draw.No.1032-2

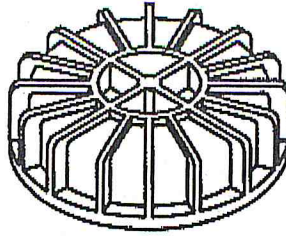


TOP CAP Draw.No.1034-1




O-Ring #63x3



SNAP OUT TOOL Draw.No.1161-1



SCREEN 0,0098 Draw.No.1033-1



	Thread	Draw.No.
HOUSING	-1/4"NPT	1035-1
	-3/4"NPT	1036-1
	-63/4"	1037-1




O-Ring #78,74x5,33



O-Ring #19x2

	Ø	Draw.No.
ADAPTER	-1"	1156-1
	-25	1027-1
	-1,05"	1028-1
	-13/16"	1029-1



	Length	Draw.No.
RISER TUBE	-1282	1160-1
	-802	1159-1
	-522	1158-1
	-382	1157-1



	Ø
BOTTOM SCREEN-TYPE GDU	-1"
	-25
	-1,05"
	-13/16"