

Resinex™ AP

Strong base anion exchange resin

Resinex™ AP is a high purity, premium grade, strongly basic macroporous anion exchange resin type 1. The macroporous crosslinked matrix offers a very high resistance to physical breakage and organic fouling. Its remarkable physical stability makes it highly suitable for industrial applications at very high velocities, such as condensate treatment and reversible removal of organics.

The selected bead distribution of **Resinex™ AP** is especially adapted for all modern counter-current systems (i.e. Schwebbett, UPCORE,..).

Typical Properties

Type	Crosslinked polystyrene divinylbenzene
Form	macroporous, milky white, spherical beads
Functional group	Quaternary amine, Type 1
Whole bead count	95% min.
Ionic form, as shipped	Cl ⁻
Bead size	0.42 - 1.42 mm
Uniformity coefficient	1.60 max.
Bulk density, as shipped	680 kg/m ³
Real density	1.08 g/cm ³
Water retention	50 - 60%
Total capacity (Cl ⁻ form)	1.15 eq/l min.
Volume change Cl ⁻ → OH ⁻	20% max.
Stability, temperature	60°C (OH ⁻ form) max.
Stability, pH	0 - 14

Standard Design Conditions

Bed depth	> 700 mm
Service flow rate	8 - 40 BV/h
Backwash expansion	50 - 75%

Key Features and Benefits

- **High Integrity Beads**
Excellent resistance to mechanical degradation ensures low pressure drop
- **Excellent Resistance To Organic Fouling**
Removable organics
- **Resistance To Osmotic Shock**
Extended lifetime and very low number of broken beads
- **Selected Bead Size**
Lower pressure drop

Typical Applications

- Demineralisation in industrial water treatment systems, especially in the presence of high organic loadings
- Demineralisation and polishing when used in combination with **Resinex™ KP**
- Treatment of electroplating rinse waters in combination with **Resinex™ KP**

Standard Packaging

- 25 lit. PE valve bag
- 1000 litre big bag




TRADEMARK OF JACOBI CARBONS. WWW.JACOBI.NET

Resinex™
Ion Exchange Resin


Resinex™ AP

Strong base anion exchange resin

Pressure Drop

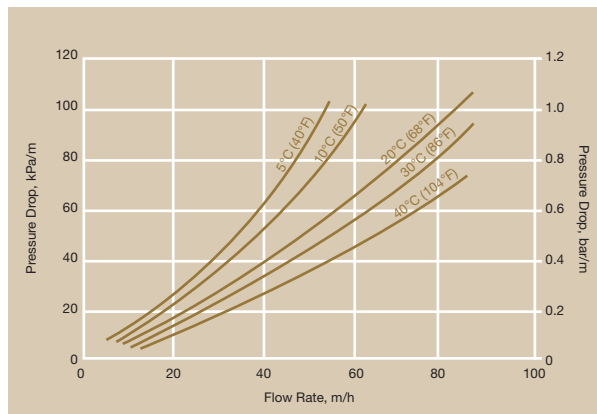

Backwash Expansion

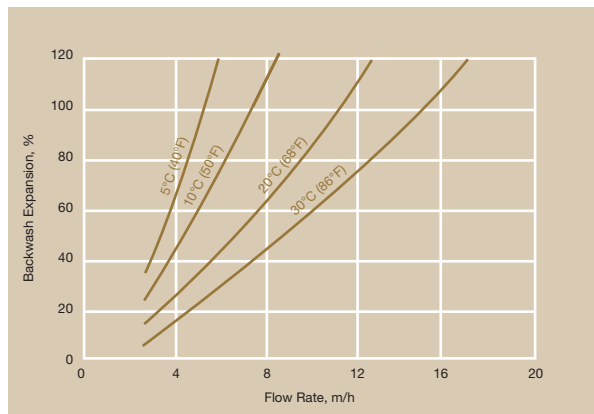

Standard Regeneration Parameters

Co-Flow

Counter-Flow

Concentration	4% NaOH	2% NaOH
Level	60-150 g/l	50-80 g/l
Flow rate regenerant	4-6 BV/h	6-8 BV/h
Contact time regenerant	30-60 min.	20-40 min.
Flow rate slow rinse	4-6 BV/h	6-8 BV/h
Slow rinse water required	2-4 BV	2 BV
Flow rate fast rinse	10-30 BV/h	10-30 BV/h
Fast rinse water required	6-10 BV	6-10 BV

The use of a weak base solution such as ammonia or sodium carbonate as a regenerant is an alternative to caustic soda. Please contact your nearest Jacobi Carbons sales office for further information.

Product Packing



25 lit. polyethylene valve bag
48 bags per pallet



Polypropylene FIBCs
(big bag), 1.000 lit.



NOTICE Jacobi Carbons reserves the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for the customers use. Jacobi Carbons assumes no obligation or liability for the usage of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

CAUTION Strong oxidizing agents such as nitric acid can react violently with ion exchange resins and cause explosive type reactions. Before using strong oxidants, consult sources knowledgeable in the handling of these materials.



SWEDEN

Jacobi Carbons AB
Vanvsholmen
SE-392 30 Kalmar
Phone: +46-480-417550
FAX: +46-480-417559
Email: info@jacobi.net

FINLAND

Jacobi Carbons AB (SS)
Ruoholahdenkatu 8
SF-00180 Helsinki
Phone: +358-9-643602
FAX: +358-9-642900
Email: infofin@jacobi.net

GERMANY

Jacobi Carbons GmbH
Feldbergstraße 21
D-60323 Frankfurt/Main
Phone: +49-69-719107-0
FAX: +49-69-719107-20
Email: infode@jacobi.net

UNITED STATES

Jacobi Carbons, Inc.
1335 Dublin Road Suite 217D
Columbus, OH 43215
Phone: +1-215-546-3900
FAX: +1-215-546-9921
Email: infous@jacobi.net

UNITED KINGDOM

Jacobi Carbons Ltd
E12 Croft Court, Moss Estate
WN73PT Leigh, Lancashire
Phone: +44-1942-670600
FAX: +44-1942-670605
Email: infouk@jacobi.net

MALAYSIA

Jacobi Carbons (Asia) Sdn Bhd
Lot 12070-F, Jalan Usahajaya,
Permatang Tinggi, 14100, Penang
Phone: +60-4-5882122
FAX: +60-4-5886122
Email: infoasia@jacobi.net



Jacobi

www.resinex-ixr.com
www.jacobi.net